

PETROSOL 95A XILENO

Isomers of xylene

IDENTIFICATION

EC number: 905-588-0

DESCRIPTION

PETROSOL 95A XILENO is an aromatic solvent. It is a mix of xylene isomers.

APPLICATIONS

Xylene is used in adhesives and paints mainly due to its average rate of evaporation. It is also sulfonated and neutralized for the production of surfactants employed in industrial and home cleaning products.

TYPICAL PROPERTIES

Property		Unit	Value
Density	@ 15°C	kg/l	0.869
Isomers distribution			
Orto-xylene		% (wt)	27
Meta-xylene		% (wt)	30
Para-xylene		% (wt)	19
Ethylbenzene		% (wt)	24
Cumene		% (wt)	<0.10
Color Saybolt			+30
Bromine Index		mg Br/100g	<100
Distillation range			
Initial		°C	138
Final		°C	140
Aromatics		% (wt)	99.1
Benzene			<0.01
Flash point (close cup)		°C	31
Aniline point			19
Kauri-Butanol index			102
Kinematic viscosity	@ 40°C	cSt	0.51

STANDARD PACKAGING


Available in trucks and vessels.

STORAGE AND HANDLING

Store in accordance with local regulations.

HEALTH AND SAFETY

PETROSOL 95A XILENO MSDS is available. For more info, contact Cepsa product stewardship.

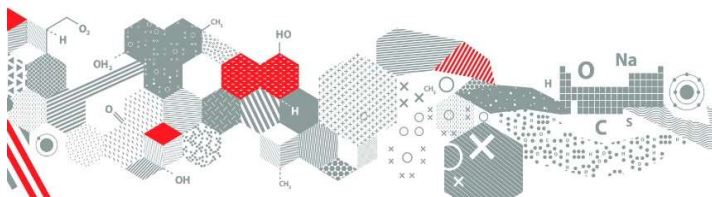

For more info, please contact us:
techsupport@cepsa.com

Cepsa Quimica S.A.
Torre Picasso. Plaza Pablo Ruiz Picasso 1
28020 Madrid (España)