

# PETROSOL 15A 15/20

White spirit

## IDENTIFICATION

CAS number: 64742-82-1

EC number: 919-446-0 (prov.)

## DESCRIPTION

PETROSOL 15A 15/20 is a kerosene fraction, with a typical initial and final distillation range of 150-200°C. It has a limited aromatics content.

## APPLICATIONS

It is used in solvents, adhesives, paints, varnishes, inks, etc.

## TYPICAL PROPERTIES

Property		Unit	Value
Density	@ 15°C	kg/l	0,777
Color Saybolt			+30
Bromine Index		mg Br/100g	<150
Distillation range			
Initial		°C	156
Final		°C	195
Aromatics		% (wt)	18
Flash point (close cup)		°C	44
Aniline point			55
Kauri-Butanol index			38
Kinematic viscosity	@ 25°C	cSt	1,09
	@ 40°C	cSt	1,04

## STANDARD PACKAGING


Available in trucks and vessels

## STORAGE AND HANDLING

Store in accordance with local regulations.

## HEALTH AND SAFETY

PETROSOL 15A 15/20 MSDS is available. For more info, contact Cepsa product stewardship.

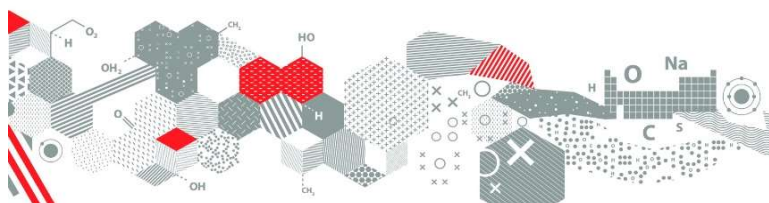

For more info, please contact us:  
[techsupport@cepsa.com](mailto:techsupport@cepsa.com)

Cepsa Quimica S.A.  
Torre Cepsa. Paseo de la Castellana 259 A  
28046 Madrid (Spain)