

PETROSOL 95A TOLUENE

Methylbenzene

IDENTIFICATION

CAS number:108-88-3

EC number: 203-625-9

DESCRIPTION

PETROSOL 95A TOLUENE is an aromatic solvent of high purity, 99,8% min,

APPLICATIONS

Toluene is used in adhesives and paints mainly due to its average rate of evaporation. It is also employed in the synthesis of intermediates such as benzoic acid and benzaldehyde, and as a raw material for the production of toluene diisocyanate and trinitrotoluene.

TYPICAL PROPERTIES

Property		Unit	Value
Purity		% (m)	99,8
Density	@ 15°C	kg/l	0,872
Color Saybolt			+30
Bromine Index		mg Br/100g	<100
Distillation range			
Initial		°C	110
Final		°C	111
Aromatics		% (wt)	99,9
Benzene			<0,01
Flash point (close cup)		°C	12
Aniline point			16
Kauri-Butanol index			107
Kinematic viscosity	@ 40°C	cSt	0,62

STANDARD PACKAGING


Available in trucks and vessels

STORAGE AND HANDLING

Store in accordance with local regulations.

HEALTH AND SAFETY

PETROSOL 95A TOLUENE MSDS is available. For more info, contact Cepsa product stewardship.

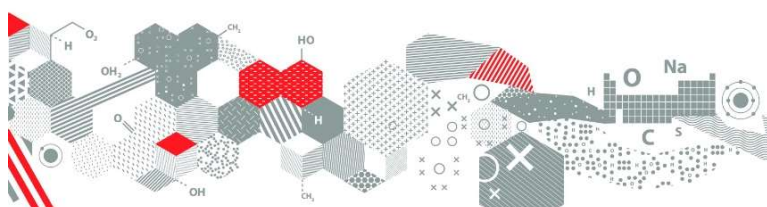

For more info, please contact us:

techsupport@cepsa.comCepsa Quimica S.A.
Torre Cepsa. Paseo de la Castellana 259 A
28046 Madrid (Spain)