

CEPAREX

IDENTIFICATION

CAS number: 64742-47-8

EC number: 926-141-6 (prov.)

DESCRIPTION

Cut of hydrogenated hydrocarbons with a final distillation temperature lower than 270°C. It has a very low aromatic content, with a low penetration smell.

APPLICATIONS

Given its low aromatic content and its imperceptible smell, it is used as fuel for heaters.

TYPICAL PROPERTIES

Property		Unit	Value
Density	@ 15°C	kg/l	0,796
Color Saybolt			+30
Bromine Index		mg Br/100g	<50
Distillation range			
Initial		°C	185
Final		°C	254
Vapor pressure (calc.)	@ 20°C	kPa	0,016
Aromatics		% (wt)	0,29
Benzene		ppm	<1
Flash point (close cup)		°C	69
Aniline point		°C	75
Kauri-Butanol index			28,5
Melting point		°C	-45
Kinematic viscosity	@ 25°C	cSt	1,99
	@ 40°C	cSt	1,39

STANDARD PACKAGING


Available in trucks and vessels

STORAGE AND HANDLING

Store in accordance with local regulations.

HEALTH AND SAFETY

CEPAREX MSDS is available. For more info, contact Cepsa product stewardship.

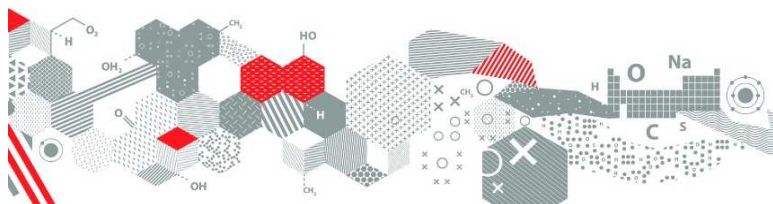

For more info, please contact us:
techsupport@cepsa.com

Cepsa Quimica S.A.
Torre Cepsa. Paseo de la Castellana 259 A
28046 Madrid (Spain)