

PETROSOL D 60

IDENTIFICATION

CAS number: 64742-48-9

EC number: 918-481-9 (prov.)

DESCRIPTION

PETROSOL D 40 is a hydrogenated naphtha-kerosene cut with a typical distillation range of 190-220°C. It has a very low aromatic content, with a low penetration smell.

APPLICATIONS

Given its low aromatic content and its imperceptible smell, it is used in paints and varnishes, as fuel, as a solvent, in lubricants and multipurpose oils, in drilling fluids, in insecticides and home air fresheners, as a degreaser, etc.

TYPICAL PROPERTIES

Property		Unit	Value
Density	@ 15°C	kg/l	0,798
Color Saybolt			+30
Bromine Index		mg Br/100g	<10
Distillation range			
Initial		°C	183
Final		°C	221
Vapor pressure (calc.)	@ 20°C	kPa	0,04
Aromatics		% (wt)	0,04
Benzene		ppm	<1
Flash point (close cup)		°C	65
Aniline point		°C	70
Kauri-Butanol index			33
Melting point		°C	<-60
Kinematic viscosity	@ 25°C	cSt	1,67
	@ 40°C	cSt	1,27

STANDARD PACKAGING


Available in trucks and vessels

STORAGE AND HANDLING

Store in accordance with local regulations.

HEALTH AND SAFETY

PETROSOL D 60 MSDS is available. For more info, contact Cepsa product stewardship.

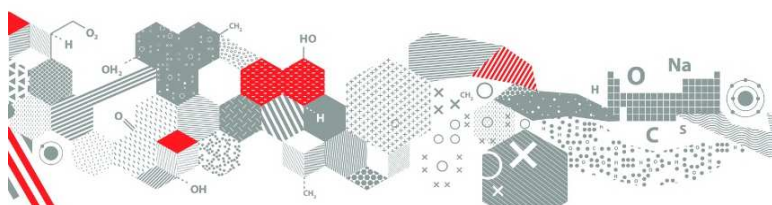

For more info, please contact us:
techsupport@cepsa.com

Cepsa Quimica S.A.
Torre Cepsa. Paseo de la Castellana 259 A
28046 Madrid (Spain)