

PETROSOL 95A XYLENE

Isomers of xylene

IDENTIFICATION

EC number: 905-562-9

DESCRIPTION

PETROSOL 95A XYLENE es un hidrocarburo aromático mezcla de isómeros del xileno en una proporción variada.

APPLICATIONS

Xylene is used in adhesives and paints mainly due to its average rate of evaporation. It is also sulfonated and neutralized for the production of surfactants employed in industrial and home cleaning products.

TYPICAL PROPERTIES

Property	Unit	Value
Density @ 15°C	kg/l	0,869
Isomers distribution		
Orto-xylene	% (m)	27
Meta-xylene	% (m)	30
Para-xylene	% (m)	19
Ethylbenzene	% (m)	24
Color Saybolt		+30
Bromine Index	mg Br/100g	<100
Distillation range		
Initial	°C	138
Final	°C	140
Aromatics	% (wt)	99,1
Benzene		<0,01
Flash point (close cup)	°C	31
Aniline point		19
Kauri-Butanol index	% (wt)	102
Kinematic viscosity @ 40°C	cSt	0,51

STANDARD PACKAGING


Available in trucks and vessels

STORAGE AND HANDLING

Store in accordance with local regulations.

HEALTH AND SAFETY

PETROSOL 95A XYLENE MSDS is available. For more info, contact Cepsa product stewardship.

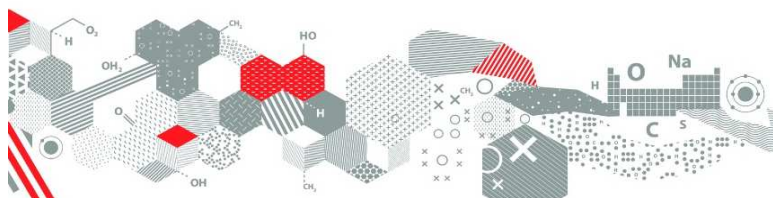

For more info, please contact us:

techsupport@cepsa.com

Cepsa Quimica S.A.
Torre Cepsa. Paseo de la Castellana 259 A
28046 Madrid (Spain)