

# MALEIC ANHYDRIDE

## IDENTIFICATION

CAS number: 108-31-6

EC number: 203-571-6

## DESCRIPTION

Maleic anhydride is a white solid obtained from partial oxidation with air of o-xylene on a solid bed.

## APPLICATIONS

The majority of the maleic anhydride produced is used in unsaturated polyester resins (UPR).

## TYPICAL PROPERTIES

Property	Unit	Value
Purity	% (wt)	99,7
Density @ 60°C	kg/l	1,53
Color	Hazen	20
Ashes	ppm	<15
Iron	ppm	<3
Maleic acid	% (wt)	0,3
Melting point	°C	52
Boiling point	°C	202

## STANDARD PACKAGING


Available in trucks in molten form.

## STORAGE AND HANDLING

Store in accordance with local regulations.

## HEALTH AND SAFETY

Maleic anhydride MSDS is available. For more info, contact Cepsa product stewardship.

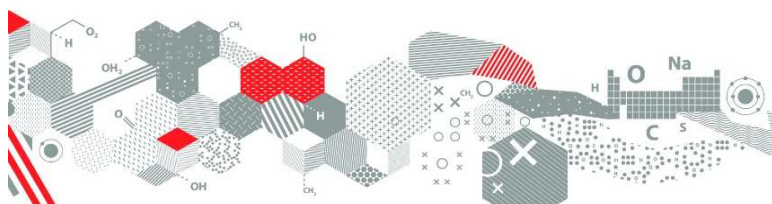

For more info, please contact us:

[techsupport@cepsa.com](mailto:techsupport@cepsa.com)

Cepsa Quimica S.A.  
Torre Cepsa. Paseo de la Castellana 259 A  
28046 Madrid (Spain)