

# PETROSOL 95A 16/18

## IDENTIFICATION

CAS number: 64742-95-6

EC number: 918-668-5

## DESCRIPTION

PETROSOL 95A 16/18 is a mix of aromatic hydrocarbons, mainly C9-C10, with a typical initial and final distillation range of 160-180°C

## APPLICATIONS

Given its great solvent power, it is used in adhesives and paints.

## TYPICAL PROPERTIES

Property		Unit	Value
Density	@ 15°C	kg/l	0,875
Color Saybolt			+30
Bromine Index		mg Br/100g	<150
Distillation range			
Initial		°C	158
Final		°C	177
Aromatics		% (wt)	99,4
Benzene			<0,01
Flash point (close cup)		°C	47
Aniline point			11
Kauri-Butanol index		% (wt)	90
Kinematic viscosity	@ 40°C	cSt	0,70

## STANDARD PACKAGING


Available in trucks and vessels

## STORAGE AND HANDLING

Store in accordance with local regulations.

## HEALTH AND SAFETY

PETROSOL 95A 16/18 MSDS is available. For more info, contact Cepsa product stewardship.

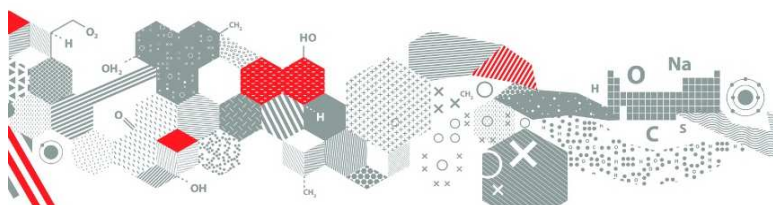

For more info, please contact us:

[techsupport@cepsa.com](mailto:techsupport@cepsa.com)

Cepsa Quimica S.A.  
Torre Cepsa. Paseo de la Castellana 259 A  
28046 Madrid (Spain)